



Lithium Ion Battery Portable Emergency Power Station 999Wh

Basic Information

TIANJIN TOEC HUADIAN TECHNOLOGY Brand Name:

CO., LTD

HDRC1000 Model Number:



Product Specification

. Battery Type: Lithium-ion Battery

999Wh · Capacity: • LED Display: Yes • LED Light: Yes

Product Name: Portable Outdoor Power Station

• Recharge Time: 8-10 Hours

• Highlight: Lithium Ion Portable Emergency Power,

Portable Emergency Power 999Wh, emergency power station 1000W

Product Description

We usually export large quantities to foreign countries. Hope to find more trade partners.

Portable Outdoor Power Station: LCD, DC/Cigarette/USB Output, PV/DC Input, 1000W Product Description

- 1. LCD display
- 2. DC output
- 3. Cigarette lighter socket output
- 4. USB output
- 5. PV input
- 6. DC input
- 7. Anti collision strip
- 8. Wireless charger
- 9. SOS mode and LED lights
- 10. Air inlet with cooling fan
- 11. AC output
- 12.1000W
- 13. Ternary lithium battery
- 14.5.1 Bluetooth version Describe

HDRC1000 is a portable energy storage power supply product that meets the American AC power standards, with a rated AC output power of 1000W and a 21700 ternary lithium battery capacity of 999Wh. It is suitable for household emergency power consumption, outdoor travel, emergency disaster relief, outdoor work, and other occasions.

This product has a total AC rated output power of 1000W, with two 110V AC outputs, three USB-A outputs that meet the QC3.0 standard, one USB-C output that meets the PD60 standard, two DC5525 outputs, and one cigarette lighter port output. It has a built-in 5W LED lighting and SOS alarm function, and supports Bluetooth version 5.1.

This product supports 110V AC charging through the standard 24V/6.25A AC adapter, as well as DC photovoltaic 18V/100-200W charging and DC 12V car charger to charge the product.

General specifications

donoral opcomoditorio	
General specifications	
Rated capacity	999wh
Weight (net weight)	≈8.8kg
Weight (including accessories)	≈9.8kg
Product size	314mmx233mmx276mm
Cell	ternary
frequency	50/60Hz
USB-A	2×18W+3×10W
USB-C	1×60W
DC output	DC output × 4+cigarette lighters output a total of 96W
AC charging	500W
Solar charging	155W
In car charging	96W
UPS	10ms
Bluetooth	Supports version 5.1
speaker	5W×2
LED lights	2W lighting, 6W reading light
USB output	QC3.0/18W
C-type output	PD60W
battery	•
Standard battery capacity	3.7V 270Ah
working temperature	14-104 (-10-40)
Charging temperature	32-104 (0-40)
Storage temperature	-4-113 (-20-45)
	·


Security protection mechanism

High and low temperature charging overvoltage and overcurrent protection, high and low temperature discharge undervoltage and overcurrent protection, overload and reverse connection protection, output overload and short circuit protection, system overtemperature, lightning strike resistance, and surge protection

Application

Suitable for emergency household electricity use, outdoor travel, mountaineering and fishing, emergency relief, outdoor work, and other occasions.

BMS intelligent management system, multiple safety protection, high temperature/low temperature/over discharge/overload/short circuit/over voltage/over current/battery protection.

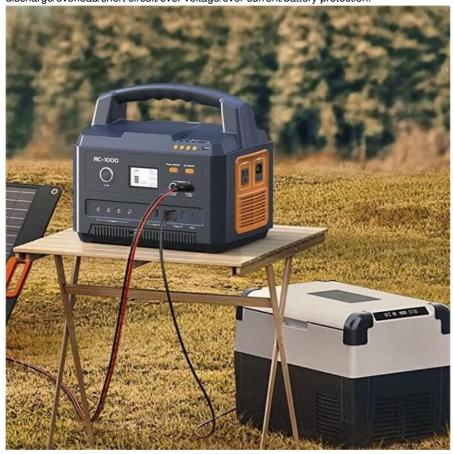



TIANJIN TOEC HUADIAN TECHNOLOGY CO., LTD



13752486626





outdoorpower-station.com

No. 6, Mount Taishan Road, Hexi District, Tianjin